



FENCE DETAIL PLAN

Stain "Heritage Blue" by Cloverdale

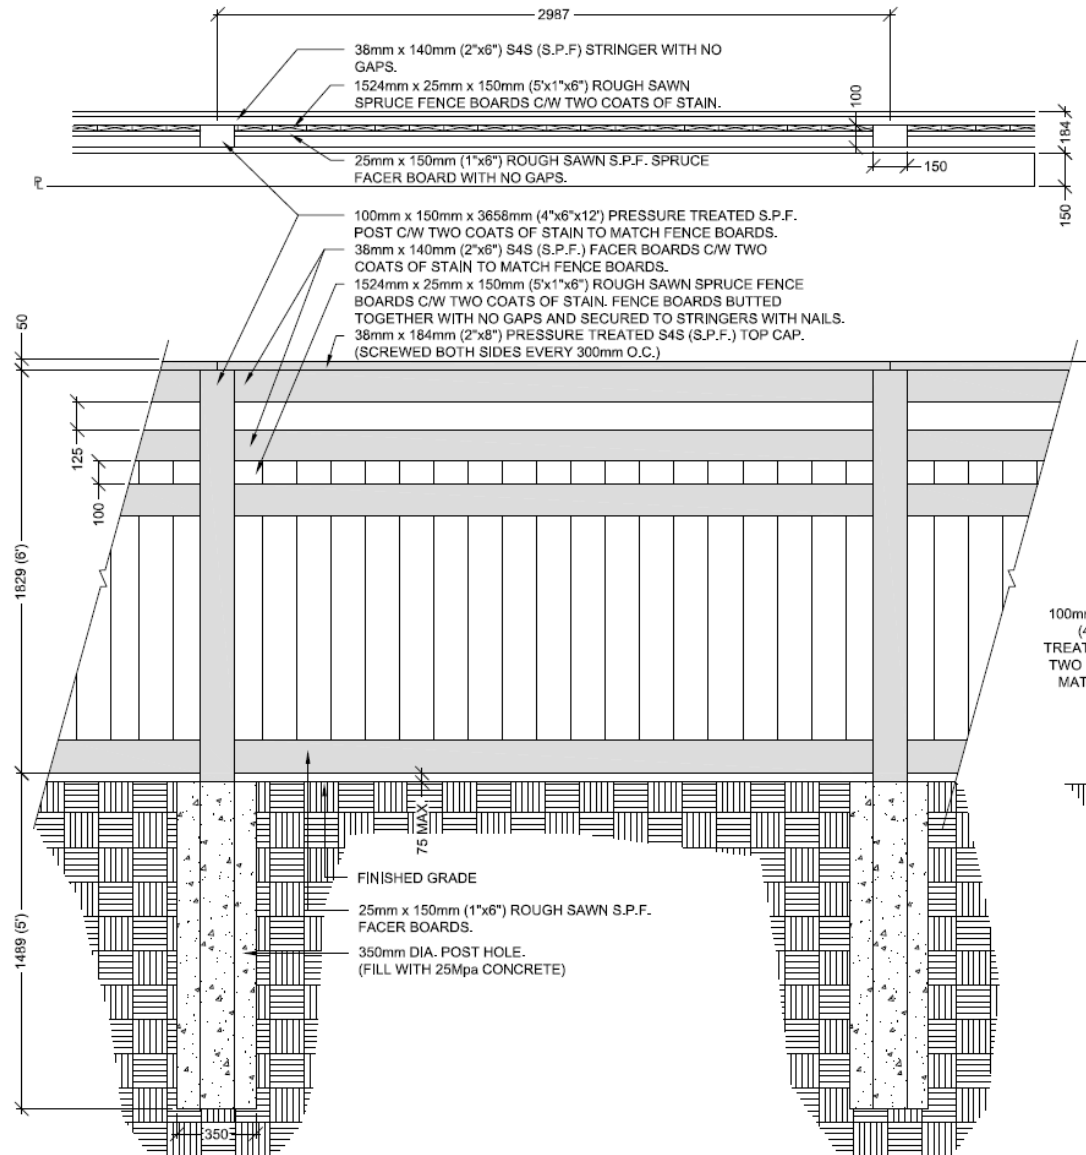



WOOD FENCE NOTES:

1. ALL TIMBER POSTS AND BEAMS TO BE PRESSURE TREATED PINE OR FIR, ROUGH SAWN TIMBER PAINTED WITH TWO COATS SOLID WOOD STAIN BY CLOVERDALE ON BOTH SIDES PRIOR TO INSTALLATION.
2. ALL LUMBER SHALL BE CLEAN, #1, CONSTRUCTION GRADE PINE, FIR OR SPRUCE MEMBERS, FINISHED AS PER THE DETAILS UNLESS OTHERWISE SPECIFIED.
3. ALL LUMBER SHALL BE STRAIGHT, SOUND AND FREE OF SPLINTS, WARPS, CRACKS, LARGE KNOTS AND OTHER DEFECTS.
4. ALL COLORS AND TYPE OF STAIN ARE AS PER THE DETAILS AND TO BE APPLIED AS PER MANUFACTURER'S SPECIFICATION AND ARE TO BE SUBMITTED TO THE LANDSCAPE ARCHITECT FOR APPROVAL PRIOR TO PROCEEDING.
5. ALL WOOD TO BE PRE-STAINED WITH "HERITAGE BLUE" BY CLOVERDALE BOTH SIDES PRIOR TO INSTALLATION.
6. #72304 "HERITAGE BLUE" - WSH031 CLEAR BASE 72304 B-10Y20 C-1Y16 E-3Y58 L-15Y KX-21Y18 PER 5 GALLON PAIL.
6. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.
7. ENSURE THAT FRONT OF POST IS 1.5 METERS FROM GASLINE.
8. ALL WOOD SCREEN FENCES TO BE PLACED 150mm. INSIDE PRIVATE PROPERTY W/O COLUMNS AND 250mm W/ COLUMNS.
9. ALL HARDWARE TO BE GALVANIZED.
10. PRESSURE TREATED POSTS TO BE TREATED WITH A SOLUTION OF PENTACHLOROPHENOL AND PETROLEUM TO CSA-080.
11. NAILS TO BE 89mm ARDOX COATED FOR STRINGERS TO POSTS AND 57mm ARDOX COATED FOR BOARDS (3 PER BOARD).
12. CONTRACTOR TO CALL ALBERTA FIRST CALL AT 1-800-242-3447 TO HAVE EXISTING UTILITIES LOCATED PRIOR TO START OF ANY CONSTRUCTION.
13. THIS DRAWING TO BE READ IN CONJUNCTION WITH THE WRITTEN SPECIFICATIONS, DRAWINGS AND DETAILS FOR THE PROJECT.

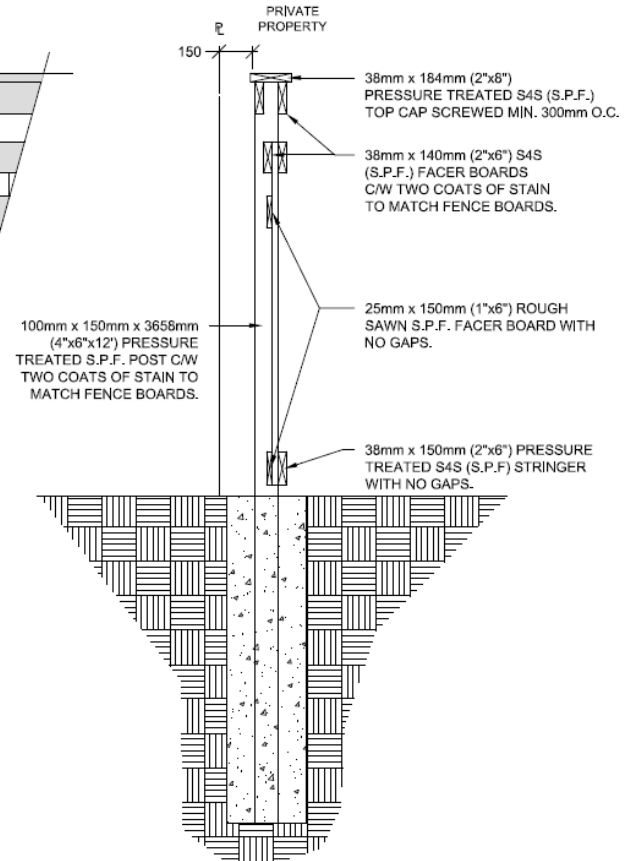

WOOD FENCE NOTES:

1. ALL TIMBER POSTS AND BEAMS TO BE PRESSURE TREATED PINE OR FIR, ROUGH SAWN TIMBER PAINTED WITH TWO COATS SOLID WOOD STAIN BY CLOVERDALE ON BOTH SIDES PRIOR TO INSTALLATION.
2. ALL LUMBER SHALL BE CLEAN, #1, CONSTRUCTION GRADE PINE, FIR OR SPRUCE MEMBERS, FINISHED AS PER THE DETAILS UNLESS OTHERWISE SPECIFIED.
3. ALL LUMBER SHALL BE STRAIGHT, SOUND AND FREE OF SPLINTS, WARPS, CRACKS, LARGE KNOTS AND OTHER DEFECTS.
4. ALL TYPE OF STAIN TO BE APPLIED AS PER MANUFACTURER'S SPECIFICATION.
5. ALL WOOD TO BE PRE-STAINED WITH "HERITAGE BLUE" BY CLOVERDALE BOTH SIDES PRIOR TO INSTALLATION.
6. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.
7. ENSURE THAT FRONT OF POST IS 1.5 METERS FROM GASLINE.
8. ALL WOOD SCREEN FENCES TO BE PLACED 150mm INSIDE PRIVATE PROPERTY.
9. ALL HARDWARE TO BE GALVANIZED.
10. PRESSURE TREATED POSTS TO BE TREATED WITH A SOLUTION OF PENTACHLOROPHENOL AND PETROLEUM TO CSA-080.
11. NAILS TO BE 89mm ARDOX COATED FOR STRINGERS TO POSTS AND 57mm ARDOX COATED FOR BOARDS (3 PER BOARD).
12. CONTRACTOR TO CALL ALBERTA ONE CALL AT 1-800-242-3447 TO HAVE EXISTING UTILITIES LOCATED PRIOR TO START OF ANY CONSTRUCTION.

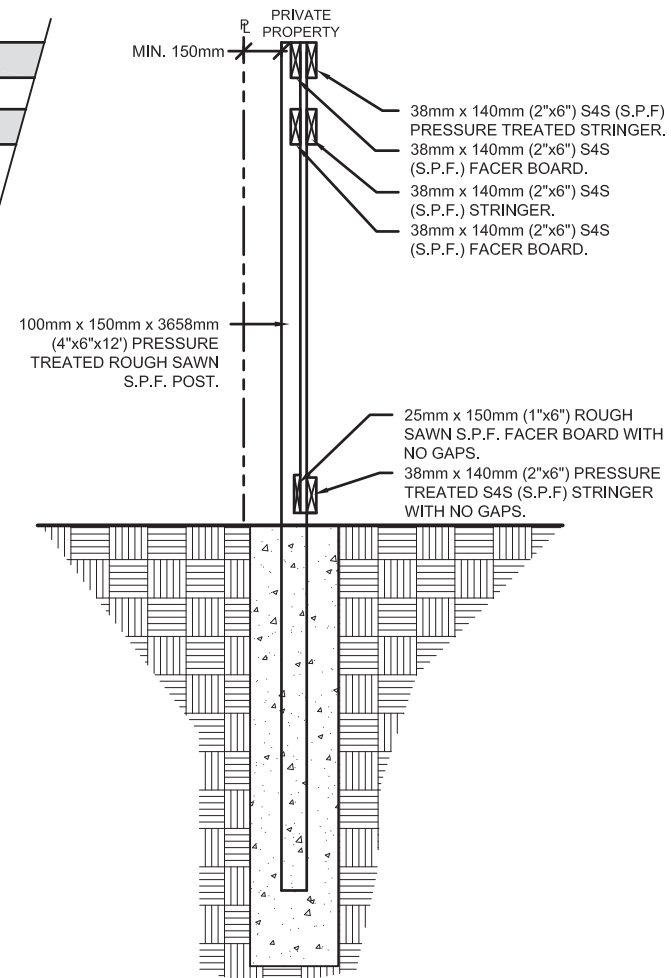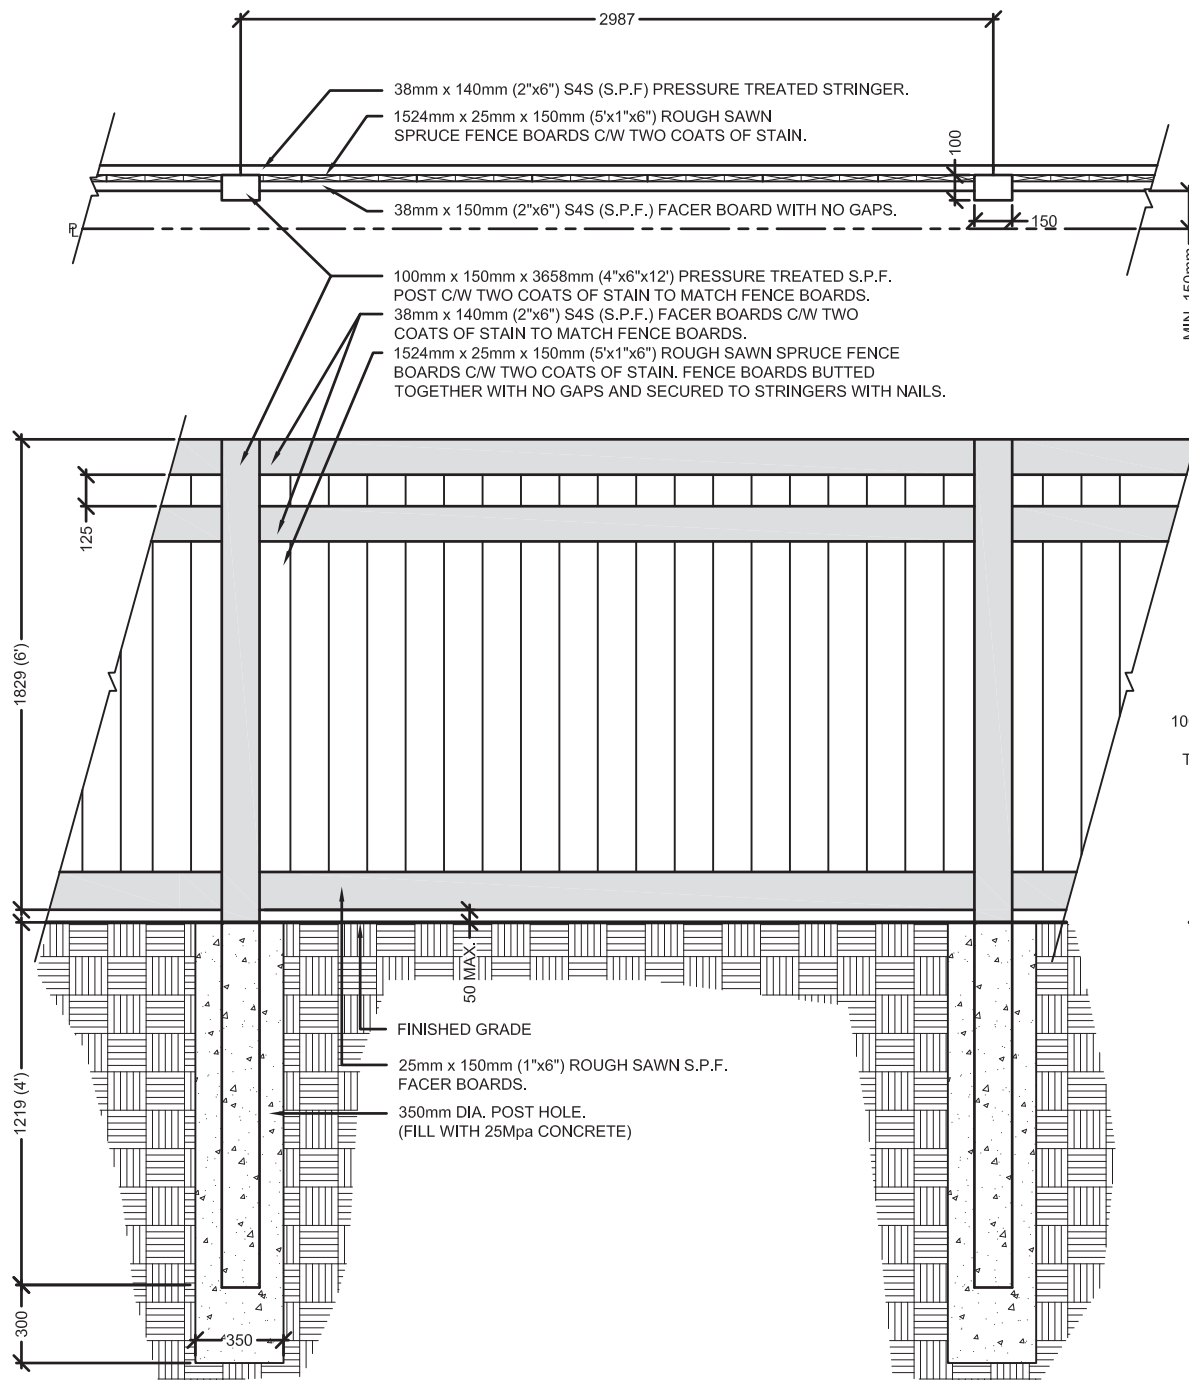

1800mm ht. STANDARD WOOD SCREEN FENCE
SCALE: N.T.S.