

SOUTH POINTE



Architectural & Design Guidelines

Stage 9 Detached Garage

March 8, 2018

CONTENTS:

<u>Section</u>	<u>Description</u>	
	DIRECTORY	3
	OBJECTIVE	4
1.0	STREETSCAPE	4
2.0	HOUSE SIZE	4
3.0	SITE PLANNING AND GRADING	4
4.0	GARAGE / DRIVEWAY / WALKWAY	4
5.0	IDENTICAL ELEVATIONS.....	5
6.0	EXTERIOR COLORS.....	5
7.0	CORNER LOTS	5
8.0	ROOFING	5
9.0	EXTERIOR FINISHES	5
10.0	FENCING	6
10.1	LANDSCAPING	6
11.0	ANCILLARY BUILDINGS / GARDEN SHEDS	6
12.0	INTERPRETATION	6
13.0	SITING	6
13.1	Consultant.....	7
13.2	City Regulations	7
13.3	Grading	7
13.4	Plot Plans	7
14.0	SUBDIVISION APPEARANCE	7
14.1	Signage	7
14.2	Excavation Material	7
14.3	Clean-Up.....	7
14.4	Construction Activity.....	7
15.0	APPROVAL PROCESS	7
16.0	DAMAGE DEPOSITS	8
16.1	Deposit Return Procedure.....	8
	Fencing Details	10
	Application Form	11
	Final Inspection Request Form	12
	Lot Plan.....	13

DIRECTORY:

<p>Manager MLC Group - Chris Nicholas / Shawna Devlin 780-420-0044 (Fax 780-423-0044) #1000, 10104 – 103 Avenue Edmonton, AB. T5J 0H8</p>	<p>Surveyor Stantec Geomatics - Brent Rudko 780-917-7000 (Fax 780-917-7289) 10160 112 St NW Edmonton, AB. T5K 2L6</p>
<p>Engineers Stantec - Tariq Mahmood 780-917-7000 (Fax 780-917-7289) 10160 112 St NW Edmonton, AB. T5K 2L6</p>	<p>Solicitor Oshry & Company - Karen Oshry 780-428-1731 (Fax 780-420-6290) # 1004, 10104 – 103 Avenue Edmonton, AB. T5J 0H8</p>
<p>Architectural Applications Windward Landtec Inc. - Ray Jacobson 780-454-6799 (Fax 780-454-6896) 12128 – 121 A Street Edmonton, AB. T5L 0A4 info@windwardlandtec.com www.windwardlandtec.com</p>	<p>Geotechnical Consultants J.R. Paine & Assoc. - Rick Evans 780-489-0700 (Fax 780-489-0800) 3051 Parsons Road Edmonton, AB. T6N 1C8</p>

OBJECTIVE

The objective of these architectural guidelines is to ensure the very highest standard of visual appeal and image; ensuring compatibility among homes and integration of the community into the natural landscape. Outlining the opportunities and constraints of building, these guidelines will assist builders, designers and home buyers in achieving problem free construction.

1.0 STREETSCAPE

Care must be taken to integrate the unique values of each home with special attention to the relationship with neighboring properties. Relative massing, siting and style will be of utmost importance in assuring each home compliments it's' neighbor and the subdivision. Building massing, siting and style may be adjusted and/or alternate treatments requested to reinforce the streetscape. Entranceways will be covered at a level that encloses and protects the space. The style, width, height and detailing of entranceways will together create a sense of arrival.

2.0 HOUSE SIZE

Houses are to have a consistency of mass and volume within the streetscape. As such, house widths and sizes must relate proportionately and logically to the lot width and neighboring houses.

The minimum house width must be within 2'-0" recommended building pocket.

Homes will be reviewed on their individual merits of design, massing, proportion, and compatibility.

3.0 SITE PLANNING AND GRADING

Site planning and grading must accommodate the natural slope of the land with variations in grade absorbed within the building mass as much as possible. Lot grading must be in strict conformance with the approved grading plan for the subdivision.

Special attention is to be given the treatment of exposed concrete foundation walls. A maximum of 2'0" of parged concrete will be permitted on the front and corner elevations. Variation in grade and basement design may require cladding material be lowered or extended to within 2'0" of ground level accordingly.

Front entry steps are to be a maximum of three risers per set. Where the grade calls for more than three risers, the run must be split. Exceptions to this requirement may be granted in consideration of unique design, topography and lateral bracing concerns. If there are more than three risers per set, the step will be a minimum of 4' wide with appropriate railing style.

Additional setbacks may be required to articulate and provide streetscape differentiation to all proposed homes. Homes will be reviewed on their individual merits of design, massing, proportion and compatibility and, where the Architectural Consultant considers the plan to be exceptional, and, provided that the house conforms to the general trend of the neighborhood, exceptions may be

considered.

4.0 GARAGE/DRIVEWAY/WALKWAY

The front walkway must be a minimum of poured concrete in broom finish, 30" wide. Individual patio blocks will not be permitted.

A 20' x 20' poured concrete parking pad must be provided concurrent with house construction. The approach to the lane may be paved with asphalt or concrete.

Detached garages should be consistent in style, finish, and color with the design of the house.

5.0 IDENTICAL ELEVATIONS

Similar or approximately identical elevations must not be repeated within 2 lots or directly across the street (XOAX). To be considered different, an alternate elevation must reflect substantial modifications. Repetitive use of elevations, this includes front elevations as well as high visibility rear elevations will be monitored to ensure interesting streetscapes.

6.0 EXTERIOR COLORS

Colors will be approved on a lot by lot basis without repetition on adjacent lots. The use of a third accent color is required.

The overhead garage door must be painted to match the wall cladding.

7.0 CORNER LOTS

Houses on the corner lots require special design consideration. Flanking side elevations should have suitable front elevation treatments with principal roof planes sloping towards view. All models will be considered for corner lots based on their unique suitability to these locations. Two story models this may include variation in wall planes, roof at second floor set back of main floor to provide substantial roof mass between floors, appropriate wall heights, window placement and use of detailing.

Lots Affected: Lot 1 & 7, Block 21

Lot 1 & 9, Block 22

8.0 ROOFING

Roof slopes will be a minimum 6/12. Roof pitch on a Bungalow design will be a minimum of 7/12 and may be required to be increased to ensure an acceptable streetscape. Eave overhangs are to be proportionate to the design of the home. Cantilevers and boxouts on visible elevations (front, corner and perimeter lots) must include their own roofline and overhang. All fascia boards are to be a minimum of 8".

Roof material is to be either:

IKO 25 Year Shingles in the following colors: Weatherwood, Driftwood, Dual Black or Charcoal Grey.

BP 25 Year Shingles in the following colors: Weatherwood, Charcoal Grey, Sandstone, or Slate Black.

All furnace and fireplace chimneys must be contained in a corbeled chase.

9.0 EXTERIOR FINISHES

The use of window and door surrounds and/or a combination of battens, trim boards, louvers and brick or stone will be a feature on all homes. It is the intent of this clause to ensure all openings visible from the front street will be detailed with appropriate trim.

Brick or stone (masonry) is required on the front of each home. A minimum of 90 sq ft of masonry is required. All entrance treatments and verandahs are to be accented with stone or brick. (masonry) Permitted cladding materials include vinyl siding and wood siding in horizontal application, brick/stone in stacked application, stucco, and Stonetile.

All trim and masonry details must be returned 24" around corners.

Parging not to exceed 2'0" on front and corner elevations.

An emphasis on entrance treatments is a requirement. Such treatment may include the use of verandahs, courtyards, and covered entries. Where the design does not lend itself to this concept, the use of alternate detailing and feature windows will be considered.

10.0 FENCING

Wood fencing is acceptable on all lots and as outlined in the foregoing shall be consistent in design and color with the fencing style established for the community, an illustration of which is attached.

10.1 LANDSCAPING

It is the responsibility of the Homeowner to landscape the front yard. In the case of corner lots the front yard shall include the flanking sideyard to the sidewalk, curb or boulevard and to the rear corner of the house.

The minimum landscape standard shall consist of sod, one tree and a prepared shrub bed containing at least four shrubs. Deciduous trees shall be 2" minimum caliper, coniferous trees a minimum 6' tall, and shrubs shall be a minimum of 2" in height. All landscaping must be completed, in accordance with the requirements, within six months of completion of the house (subject to seasonal limitations).

To ensure the compliance with the Landscaping Requirements, a \$2,500.00 Landscaping Deposit must be paid by the Purchaser, to be refunded by the Builder upon confirmation of satisfactory completion of the Landscaping.

11.0 ANCILLARY BUILDINGS / GARDEN SHEDS

The side wall elevations of all ancillary buildings and garden sheds shall not extend higher than adjacent fencing. Where such structures are visible from public adjacencies (i.e. all perimeter lots, corner lots and lots backing onto the lake), exterior wall finishes, style and color shall compliment those used on the house. Roof style and materials are to match the materials used on the roof of the house.

12.0 INTERPRETATION

The enforcement, administration and interpretation of these guidelines shall be at the discretion of MLC Group or its designated consultant. The unfettered application of these guidelines shall be without notice or precedent.

13.0 SITING

All homes for this phase will require 5'-0" minimum side yards, as required by the City of Fort Saskatchewan.

13.1 Consultant

Check with the Architectural Consultant and Surveyor for all applicable drawings, and any special conditions.

13.2 City Regulations

Ensure that city regulations are met and note relevant plans regarding utilities and rights of way.

13.3 Grading

Check Building Grade Plans and conform to them. Do not grade to existing vacant lots or unfinished lanes, but to elevations provided.

13.4 Plot Plans

A designated surveyor shall prepare all plot plans and perform all stakeouts in the subdivision to facilitate establishing building elevations that are consistent and appropriate.

14.0 SUBDIVISION APPEARANCE

14.1 Signage

In order to maintain cohesiveness for signage within the subdivision, all signage will be supplied by the Developer, i.e. all model signs, directional signs and general information signs. The only signage to be supplied by the Builders Group will be on lots owned or sold by that Builder. Excessive abuse of signage, including sandwich boards may necessitate removal of ALL Builder and Realtor signs.

14.2 Excavation Material

Builders must ensure that all excavation is kept within the confines of their lot. Any spillage on a road, land, sidewalk or neighboring lot must be removed immediately or the Developer will arrange

for its removal and invoice for expenses.

14.3 Clean Up

Builders should encourage timely removal by all subtrades of litter on building sites. Failure to comply will result in a clean-up bill being charged to the lot. Supply of bins by the Builder is recommended. Any general clean-up of the subdivision implemented by the Developer can and will be charged pro-rata to all builders.

14.4 Construction Activity

Each Builder is responsible for inspecting the condition of curbs, sidewalks, street lights, services, etc. on his lot and must submit written notice of any damages to the Developer (within 21 days of purchasing the lot) prior to commencing construction, otherwise costs for repairing any damages becomes the sole responsibility of the Purchaser/Builder.

15.0 APPROVAL PROCESS

Prior to application the Builder has inspected the lot and all services. All discrepancies or damage are to be reported in writing to the Developer.

Before applying to the City for a development permit, the applicant shall submit plans for approval of WINDWARD LANDTEC INC. Application shall include the following:

- a) One complete set of house plans; 1/4" or 3/16" = 1'
- b) Two Copies of the Plot plan, prepared by Stantec Geomatics, 1:300, showing lot house grades and drainage pattern, floor and garage elevations;
- c) Completed application form; and
- d) Material and color samples, as required.

WINWARD LANTEC INC. will review the plan and recommend approval, modification, or rejection of the application based on the adherence of the plans to these guidelines. Should disputes arise, the Developer shall make the final decision on the acceptability of plans. Once approved, WINDWARD LANTEC INC. will send a copy of the application indicating any changes to the applicant. After approval, the plans may not be altered without prior approval of WINDWARD LANTEC INC. WINDWARD LANTEC INC. will keep an up-to-date record of plans showing house types, color, roof lines and grades, to advise the applicants of how their proposed house will best fit into the existing situation.

16.0 DAMAGE DEPOSITS

The Builder shall supply a damage deposit or Letter of Credit in the amount of \$5,000.00 (regardless of the number of lots) is due prior to house plan and grade approval to cover:

- 1. Contravention of architectural objectives.
- 2. Possible damage to:
 - (a) Curb stop - water valve
 - (b) Sidewalks, curbs and gutters
 - (c) Driveway aprons and asphalt
 - (d) Boulevard landscaping and trees
 - (e) Rear gutters and walkways
 - (f) Light standards
 - (g) Fire hydrants
 - (h) Cathodic Protection points
 - (i) Grading and drainage swales
 - (j) Fencing


16.1 Deposit Return Procedure

- 1. Exterior completed in accordance with these guidelines and as approved by the architectural consultant.
- 2. Landscaping satisfactorily completed as per requirements.
- 3. Rough grading certificate & city approval of same, from the City of Edmonton Drainage Branch.
- 4. Water valve exposed and marked.
- 5. Sidewalks, street, lane, gutters and curbs cleaned.
- 6. Application made in writing to WINDWARD LANDTEC INC. (form attached).


Upon completion of construction, site works and landscaping, a final inspection is done to ensure compliance with the architectural guidelines and to check for any damages to municipal improvements. The following items must be completed prior to a request for final inspection:

- * Home constructed in compliance with the Guidelines and the approved plan
- * Construction complete including seasonal work on exterior, site cleared of all debris, sidewalks and curbs cleaned, cc marked and exposed
- * Landscaping completed in accordance with guideline requirements
- * Grading certificate for rough grade is provided with City approval

To initiate the final inspection, a request form accompanied by the approved grading certificate must be forwarded by the builder to Windward Landtec Inc.

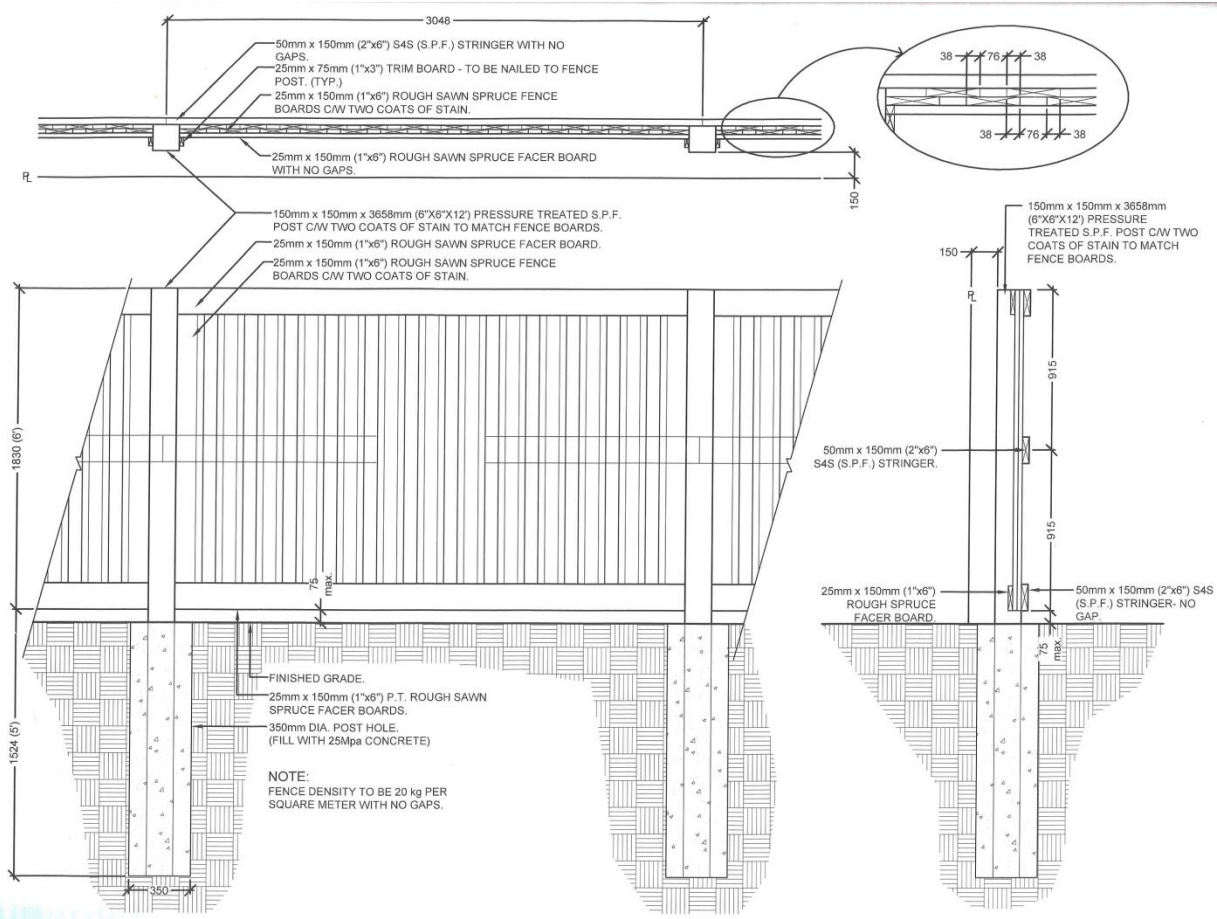

1 1800mm HT. OVERLAP WOOD SCREEN FENCE
SCALE: 1:20

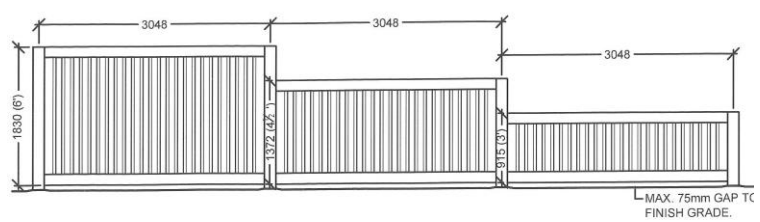

2 OVERLAP WOOD SCREEN FENCE STEP DOWN
SCALE: 1:50

- WOOD FENCING NOTES:**
1. ALL TIMBER POSTS TO BE PRESSURE TREATED SPRUCE PAINTED WITH TWO COATS STAIN.
 2. ALL LUMBER SHALL BE CLEAN, #1, CONSTRUCTION GRADE SPRUCE MEMBERS, FINISHED AS PER THE DETAILS UNLESS OTHERWISE SPECIFIED.
 3. ALL LUMBER SHALL BE STRAIGHT, SOUND AND FREE OF SPLINTS, WARPS, CRACKS, LARGE KNOTS AND OTHER DEFECTS.
 4. ALL COLORS AND TYPE OF STAIN ARE AS PER THE DETAILS AND TO BE APPLIED AS PER MANUFACTURER'S SPECIFICATION AND ARE TO BE SUBMITTED TO THE LANDSCAPE ARCHITECT FOR APPROVAL PRIOR TO PROCEEDING.
 5. ALL WOOD TO BE PRE-STAINED WITH "PEWTER" SOLID WOOD STAIN BY CLOVERDALE BOTH SIDES PRIOR TO INSTALLATION.
 6. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.
 7. ENSURE THAT FRONT OF POST IS 1.5 METERS FROM GAS LINE.
 8. ALL WOOD SCREEN FENCES TO BE PLACED INSIDE PRIVATE PROPERTY.
 9. ALL HARDWARE TO BE GALVANIZED.
 10. PRESSURE TREATED POSTS TO BE TREATED WITH A SOLUTION OF PENTACHLOROPHENOL AND PETROLEUM TO CSA-080.
 11. NAILS TO BE 89mm ARDOX COATED FOR STRINGERS AND POSTS AND 50mm ARDOX COATED FOR BOARDS.
 12. CONTRACTOR TO CALL ALBERTA FIRST CALL AT 1-800-242-3447 TO HAVE EXISTING UTILITIES LOCATED PRIOR TO START OF ANY CONSTRUCTION.
 13. THIS DRAWING TO BE READ IN CONJUNCTION WITH THE WRITTEN SPECIFICATIONS, DRAWINGS AND DETAILS FOR THE PROJECT.
 14. FENCE TO HAVE TWO COATS OF STAIN APPLIED FOR CCC. ONE ADDITIONAL COAT OF STAIN MAY BE APPLIED AT FAC PENDING CITY INSPECTION.



Subdivision _____
 Lot _____ Block _____ Plan _____
 Homeowner _____
 Municipal Address _____



APPLICANT INFORMATION

Name _____
 Address _____
 City _____ PC _____ Tel _____ Fax _____
 Job No _____



HOUSING DESIGN

Type Bungalow Bi -Level Split Level Two Storey Other

Area Main Floor _____ Second Floor _____ Total Floor _____ Sq.Ft. _____

Form Roof Style _____ Roof Pitch/Slope _____ Fascia Size _____

Exterior Detail	Manufacturer	Material	Colour
Roof	_____	_____	_____
Wall	_____	_____	_____
Brick / Stone	_____	_____	_____
Trim	_____	_____	_____
Soffit, Fascia	_____	_____	_____
Window	_____	_____	_____
Front Door	_____	_____	_____
Garage Door	_____	_____	_____
Chimney	_____	_____	_____
Driveway	_____	_____	_____
Driveway Border	_____	_____	_____
Verandah	_____	_____	_____

NOTE:
 Colour - Please specify Manufacturer's name, reference number and colour: Example, Olympic 704 Brown
 Siting and grades as per surveyors plot plan.
 Conformance to setback and lot grading requirements are the responsibility of purchaser and /or builder.

USE OF HOUSE PLAN APPROVAL SERVICES
 The Applicant acknowledges that the house plan approval is provided as a service and that the developer and its designated consultants assume no responsibility for the accuracy of the information provided, or for any losses or damages resulting from use thereof. The applicant further acknowledges that they will hold the developer and its designated consultants harmless from any action resulting from the use of this information.

Date _____ Signature _____

12128 - 121A Street, Edmonton Alberta T5L 0A4 Tel. 780.454.6799 Fax: 780.454.6896 email: info@windwardlandtec.com

APPLICATION FOR HOUSE PLAN APPROVAL



Lot _____ Block _____ Plan _____ Civic Address _____
 Subdivision _____ Stage _____ Date of Request _____
 Builder _____ Contact _____
 Phone _____ Fax _____ E-mail _____

Upon completion of construction, site works and if applicable, landscaping compliance with the architectural guidelines and to check for any damage. The following items must be completed prior to a request for final inspection (Request must be made by or through the Builder)

- ✓ Home constructed in compliance with the Architectural Guidelines
- ✓ Construction complete, including seasonal work on exterior. Site cleaned, curbs exposed and marked.
- ✓ Landscaping complete in accordance with the minimum requirements
- ✓ Grading certificate is attached and City Approval of same.
 - Rough
 - Final
- ✓ Fencing completed if required.

Landscaping Deposit Refund _____ (Home Owner)
 Date of Request: _____
 Homeowner Name (please print): _____
 Address of Home: _____
 E-mail (please print): _____
 Phone: _____

- In addition to this Form please include the following documents – based on the municipality in which you live:
- Edmonton: Final Grade Approval & Final Grade Certificate
 - Sherwood Park: Final Grade Approval & Final Grade Certificate
 - Morinville: Rough Grade Certificate
 - Fort Saskatchewan: Final Grade Approval & Final Grade Certificate
 - Spruce Grove: Final Grade Approval & Final Grade Certificate
 - Stony Plain: Final Grade Approval & Final Grade Certificate
 - I CONFIRM THAT I HAVE COMPLETED THE LANDSCAPING ARCHITECTURAL REQUIREMENTS.
 - I CONFIRM I AM THE ORIGINAL OWNER

Note: if you are not the original owner you must include documentation of the deposit transferred.

- Further, I/We confirm that:
- Tree matches the caliper/height as stated in the architectural requirements
 - Shrub beds and sod have been planted as stated in the architectural requirements
 - Any other exterior alterations and improvements comply with the architectural requirements

Inspections are typically conducted from April to September (weather permitting). If the inspections have stopped, Windward Landtec Inc. will notify you and you may resubmit when the next season begins.

NOTE: A re-inspection fee will apply for all failed inspections.

Please submit by Fax: 780-454-6896 or by E-mail: info@windwardlandtec.com

Final Inspection Request

inspection is done to ensure compliance with the architectural guidelines and to check for any damage. The following items must be completed prior to a request for final inspection (Request must be made by or through the Builder)

inspection is done to ensure compliance with the architectural guidelines and to check for any damage. The following items must be completed prior to a request for final inspection (Request must be made by or through the Builder)

municipality in which you live:

g that the deposit was legally transferred.

Further, I/We confirm that:

Inspections are typically conducted from April to September (weather permitting). If the inspections have stopped, Windward Landtec Inc. will notify you and you may resubmit when the next season begins.

www.windwardlandtec.com

SOUTH POINTE

STAGE 9

www.south-pointe.ca



This plan is for marketing purposes only and is subject to errors and omissions.
 All street furniture and landscaping locations are approximate only and subject to change.
 Refer to registered subdivision plan to confirm all lot information.
 This plan may not be used for design or construction purposes.
 Farm Air Properties/M/LC accepts no responsibility for inappropriate use of this plan.

FEBRUARY 2018

Farm Air Properties Inc
 (780) 420-0044

